

Specification

Nominal Basket Diameter	12", 304.8mm
Nominal Impedance*	8 or 16 ohms
Power Rating**	
Watts	75W
Music Program	N/A
Resonance	89Hz
Usable Frequency Range***	70Hz-5.5kHz
Sensitivity	103
Magnet Weight	56 oz
Gap Height	0.312", 7.92mm
Voice Coil Diameter	1.75", 44.5mm

Thiele & Small Parameters

Resonant Frequency (fs)	89Hz
DC Resistance (Re)	6.13
Coil Inductance (Le)	0.38mH
Mechanical Q (Qms)	11.48
Electromagnetic Q (Qes)	0.49
Total Q (Qts)	0.47
Compliance Equivalent Volume (Vas)	41.5 ltr/1.5 cu. ft.
Peak Diaphragm Displacement Volume (Vd)	42cc
Mechanical Compliance of Suspension (Cms)	0.11mm/N
BL Product (BL)	14.4 T-M
Diaphragm Mass inc. Airlod (Mms)	30 grams
Efficiency Bandwidth Product (EBP)	181
Maximum Linear Excursion (Xmax)	0.8mm
Surface Area of Cone (Sd)	519.5cm ²
Maximum Mechanical Limit (Xlim)	

Mounting Information

Recommended Enclosure Volume	
Sealed	Acceptable
Vented	N/A
Overall Diameter	12.02", 305.3mm
Baffle Hole Diameter	10.97", 278.6mm
Front Sealing Gasket	Fitted as Standard
Rear Sealing Gasket	Fitted as Standard
Mounting Holes Diameter	0.25", 6.4mm
Mounting Holes B.C.D.	11.63", 295.4mm
Depth	5.2", 132mm
Net Weight	10.8 lbs 4.9 kg
Shipping Weight	12.5 lbs 5.7 kg

Materials of Construction

Coil Construction	Copper
Coil	Nomex
Magnet Composition	Ferrite
Core Details	Non-Vented
Basket Materials	Pressed Steel
Cone Composition	Paper
Cone Edge Composition	Paper
Dust Cap Composition	Zurette



EMINENCE®
The Art and Science of Sound


THE WIZARD™

RED COAT™

A 12" speaker with enchanting tonal characteristics borrowed from Private Jack and The Governor.

Coloration: Very articulate, but with a hint of grit. Nice sustain and exceptionally good tight bottom. Cross between Private Jack and The Governor.

Genre: Classic Rock tones of the 60's and 70's.

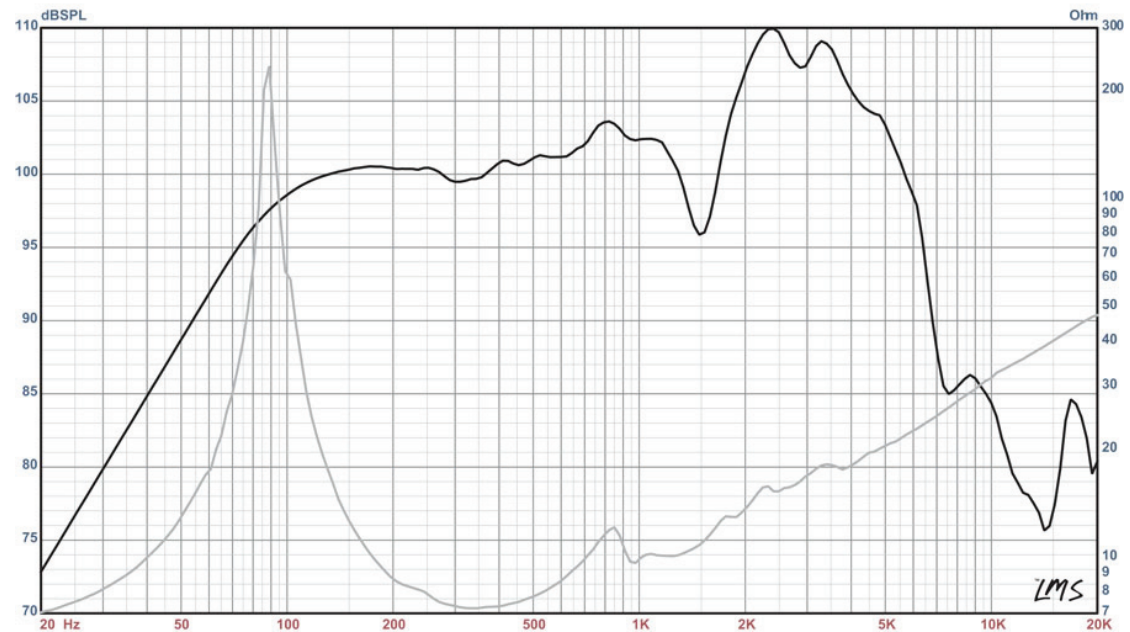

* Please inquire about alternative impedances.

** Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, nontemperature-controlled environment.

*** The average output across the usable frequency range when applying 1W/1m into the nominal impedance. I.e: 2.83 V/8 ohms, 4 V/16 ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. X 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)